

4" Round Ultimate Super Thin Recessed LED 13.5W



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

- 1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
- Wider Trim - No Goof Rings Needed For Covering Old 4" Holes
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required
- CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

DIMENSIONS: ID 4 1/8" OD 5 1/4" Cut Out 4 1/4" to 4 1/2"

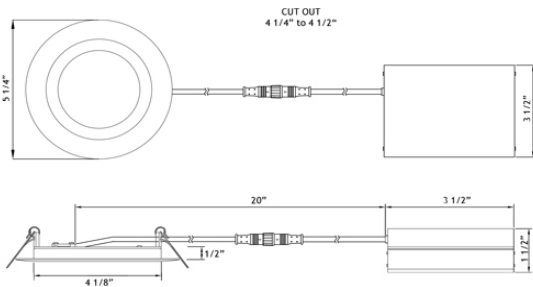

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # **LLL-LD1535T**

ORDERING GUIDE

Example: **LL4R - 30K - WH**

	CCT	Trim Finish	
LL4R	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K	BN	Brushed Nickel
5000K	50K	BC	Brushed Copper
DTW 28-20	28K	Dim to Warm 2800K to 2000K	WH Trim Only
DTW 35-20	35K	Dim to Warm 3500K to 2000K	WH Trim Only

Project: _____


Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling, Showers & Soffits
Energy Used	13.5 W
Colour Temperature	2700 3000 4000 5000 DTW 28-20 DTW 35-20
Light Output	750 760 800 850 750 760
Halogen Equivalent	75 W
Beam Angle	110°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling, Wet & Damp Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP412**



13" Flat Rough-In Plate - cat # **MP4-2**



13" Flanged Rough-In Plate - cat # **MP4**



Flanged Plate with Hanger Bars - cat # **FRP412**

COMPLIANCE



**Type IC
Air-Tight**