

**6" Round Economy Super Thin Recessed LED 14W**



**Type IC, Wet & Air-Tight**

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

**DESCRIPTION**

6" Round Recessed LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can


**FEATURES & BENEFITS**

- 1/2" Deep - Install Directly Under Joists - Maximum Layout Flexibility
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

**DIMENSIONS:** ID 6 1/8" OD 6 7/8" Cut Out 6 1/4" to 6 1/2"

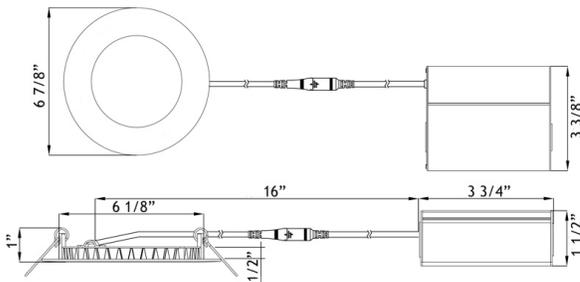

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



**AVAILABLE TRIMS**



**ORDERING GUIDE** Example: **LB6R / 30K / WH**

	CCT	Trim Finish	
<b>LB6R</b>	/	/	
3000K	<b>30K</b>	<b>WH</b>	White
4100K	<b>41K</b>	<b>BK</b>	Black

**SPECIFICATION**

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	14 W	
Colour Temperature	3000	4100
Light Output	900	930
Halogen Equivalent	90 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	cULus, Energy Star	
Warranty	5 Year	

**ACCESSORIES**

Sold Separately

-  Low Voltage Extension Cables  
10ft - cat # **EXC10**  
Max 40 ft Allowed. FT4 / CMR rated
-  26" Flat Rough-In Plates - cat # **RIP6**
-  13" Flat Rough-In Plate - cat # **MP6-2**
-  Flanged Plate with hanger Bars - cat # **FRP6**
-  Goof Ring White OD 7 5/8" cat # **GR6**

**COMPLIANCE**



**Type IC  
Air-Tight**